

## Bohrstangenrohlinge

Boring bar blanks

Barres d'alésage


ISO 12164-1  
(DIN 69893) HSK-A



**Verwendung:**  
Zur Herstellung von Sonderwerkzeugen.

**Application:**  
For the manufacturing of special tools.

**Application:**  
Pour la fabrication d'outils spéciaux.

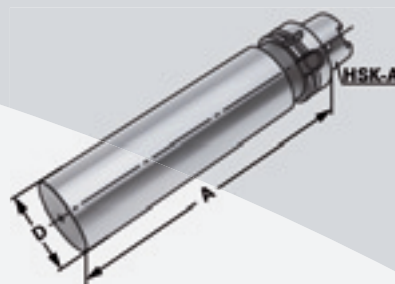

ISO 12164-1  
(DIN 69893-1)

HSK - A



Bestell-Nr.  
Order no.  
Référence

HSK

D

A

A32.17.25	HSK-A 32	32,5	100
A40.17.40	HSK-A 40	40,5	160
A50.17.50	HSK-A 50	50,5	200
A63.17.63	HSK-A 63	63,5	250
A63.17.80	HSK-A 63	80,0	250
A80.17.80	HSK-A 80	80,5	250
A100.17.97	HSK-A 100	97,5	250

**Ausführung:**

**Version:**

**Version:**

Steilkegel und Bund gehärtet und geschliffen. Schaft weich zur weiteren Bearbeitung.

Cone and flange hardened and grinded. Soft body for later processing.

Cône et collerette durcis et rectifiés. Corps doux pour un usinage ultérieur.

4



4.43