
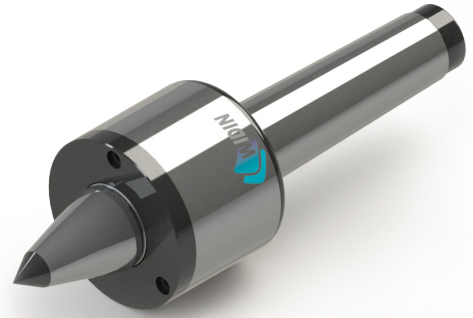


# SMBC-TYPE



※ SHAFT 확장(바이트 간섭 최소화) SHAFT EXTENSION(Minimize the bite-interference)  
 ※ 초경타입 Carbide Type

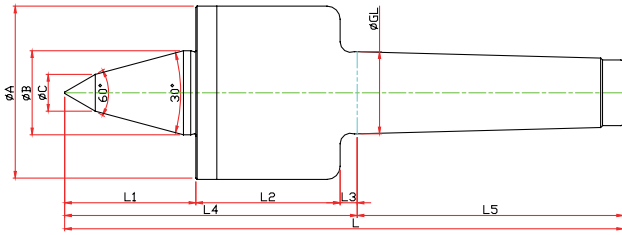

Model	Order Number	Morse Taper	Dimension											Weight MAX.	R.P.M MAX.	Run Out
			GL	A	B	b	L1	L2	L3	L4	L5	C	L			
LC-3SMBC	041103	NO.3	23,825	52	22	10	40	51	5	96	81	10	177	160	12000	0.003
LC-4SMBC	041104	NO.4	31,267	66	32	14	50	55	6.5	111.5	101.5	14	213	520	10000	0.003
LC-5SMBC	041105	NO.5	44,399	82	40	16	65	75	6.5	146.55	129.5	16	276	940	8000	0.005

# SMN-TYPE



※ 너트 타입 Nut Type

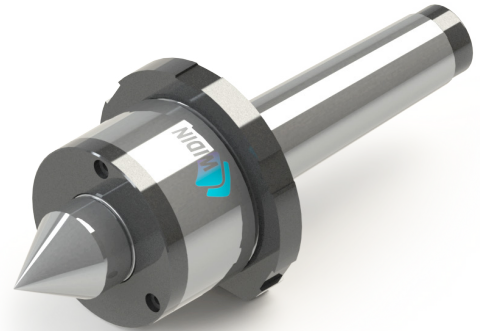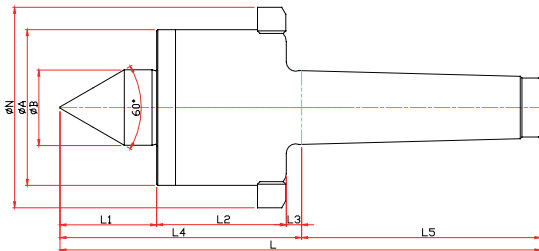

Model	Order Number	Morse Taper	Dimension										Weight MAX.	R.P.M MAX.	Run Out
			GL	A	B	L1	L2	L3	L4	L5	N	L			
LC-3SMN	040013	NO.3	23,825	52	22	30	51	5	86	81	70	167	330	12000	0.003
LC-4SMN	040014	NO.4	31,267	66	32	41	55	6.5	102.5	101.5	85	204	1100	10000	0.003
LC-5SMN	040015	NO.5	44,399	82	40	51	75	6.5	132.5	129.5	105	262	2200	8000	0.005

# SMBN-TYPE

※ SHAFT 확장(바이트 간섭 최소화) SHAFT EXTENSION(Minimize the bite-interference)

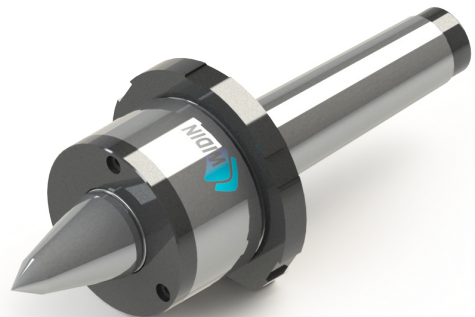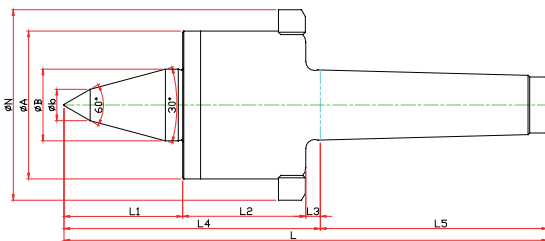

Model	Order Number	Morse Taper	Dimension											Weight MAX.	R.P.M MAX.	Run Out
			GL	A	B	b	L1	L2	L3	L4	L5	N	L			
LC-3SMBN	041013	NO.3	23,825	52	22	10	40	51	5	96	81	70	177	160	12000	0.003
LC-4SMBN	041014	NO.4	31,267	66	32	14	50	55	6.5	111.5	101.5	85	213	520	10000	0.003
LC-5SMBN	041015	NO.5	44,399	82	40	16	65	75	6.5	146.5	129.5	105	276	940	8000	0.005