

2FLUTE, 45° HELIX CORNER RADIUS-FOR ALUMINUM  
2 FLUTE, REGULAR LENGTH, CORNER RADIUS - for Aluminum

- Suitable for Aluminum, Aluminum Alloy, Copper & Non-Ferrous Material

## WAR302 ...series




EDP NO.	DIAMETER	CORNER RADIUS	CUTTING LENGTH	OVERALL LENGTH	SHANK DIAMETER
	D	R	L <sub>1</sub>	L <sub>2</sub>	D <sub>2</sub>
WAR302 06 05	6	0.5	15	50	6
WAR302 06 10	6	1	15	50	6
WAR302 06 15	6	1.5	15	50	6
WAR302 06 20	6	2	15	50	6
WAR302 08 05	8	0.5	20	60	8
WAR302 08 10	8	1	20	60	8
WAR302 08 15	8	1.5	20	60	8
WAR302 08 20	8	2	20	60	8
WAR302 08 30	8	3	20	60	8
WAR302 10 05	10	0.5	25	70	10
WAR302 10 10	10	1	25	70	10
WAR302 10 15	10	1.5	25	70	10
WAR302 10 20	10	2	25	70	10
WAR302 10 30	10	3	25	70	10
WAR302 10 40	10	4	25	70	10
WAR302 12 10	12	1	30	75	12
WAR302 12 20	12	2	30	75	12
WAR302 12 30	12	3	30	75	12
WAR302 12 40	12	4	30	75	12
WAR302 14 10	14	1	35	80	14
WAR302 14 20	14	2	35	80	14
WAR302 14 30	14	3	35	80	14
WAR302 14 40	14	4	35	80	14
WAR302 14 50	14	5	35	80	14

■ Tolerance

Mill Dia. (mm)	Shank Dia.
0 ~ -0.02	h6

※ Items can be changed for quality improvement without notice.

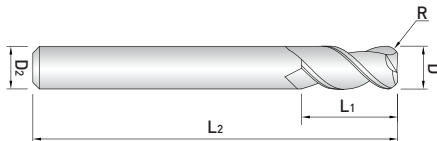

2FLUTE, 45° HELIX CORNER RADIUS-FOR ALUMINUM  
2 FLUTE, REGULAR LENGTH, CORNER RADIUS - for Aluminum

- Suitable for Aluminum, Aluminum Alloy, Copper & Non-Ferrous Material

## WAR302 ...series



EDP NO.	DIAMETER		CORNER RADIUS		CUTTING LENGTH		OVERALL LENGTH		SHANK DIAMETER	
	D	R	L <sub>1</sub>	L <sub>2</sub>	D <sub>2</sub>					
WAR302 16 10	16	1	40	90	16					
WAR302 16 20	16	2	40	90	16					
WAR302 16 30	16	3	40	90	16					
WAR302 16 40	16	4	40	90	16					
WAR302 16 50	16	5	40	90	16					
WAR302 20 10	20	1	45	100	20					
WAR302 20 20	20	2	45	100	20					
WAR302 20 30	20	3	45	100	20					
WAR302 20 40	20	4	45	100	20					
WAR302 20 50	20	5	45	100	20					

■ Tolerance

Mill Dia.(mm)	Shank Dia.
0 ~ -0,02	h6

※ Items can be changed for quality improvement without notice.