



Lever lock type for external wide grooving and profiling

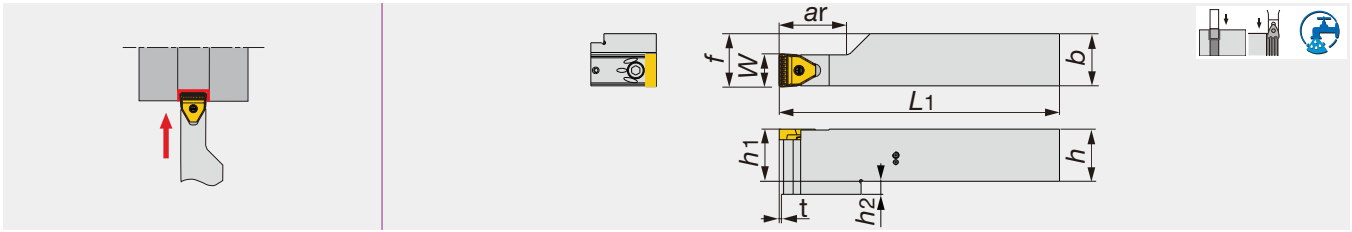

Designation	W	ar PSGB	ar PSGM	h1	b	h	L1 PSGB	L1 PSGM	f	h2	t PSGB	t PSGM	Insert ⁽¹⁾
FPGR2525M-10T20	10	25	20	25	25	25	155	150	25.5	-	5.5	0.5	PSG*10...
FPGR3232P-10T36	10	41	36	32	32	32	175	170	32.5	-	5.5	0.5	PSG*10...
FPGR2525M-15T20	15	25	20	25	25	25	155	150	25.5	-	5.5	0.5	PSG*15...
FPGR3232P-15T40	15	45	40	32	32	32	175	170	32.5	-	5.5	0.4	PSG*15...
FPGR3232P-20T40	20	45	40	32	32	32	175	170	32.5	8	5.5	0.4	PSG*20...
FPGR4040R-20T50	20	55	50	40	40	40	205	200	40.5	8	5.5	0.4	PSG*20...
FPGR3232P-25T40	25	45	40	32	32	32	175	170	32.5	8	5.5	0.4	PSG*25...
FPGR4040R-25T50	25	55	50	40	40	40	205	200	40.5	8	5.5	0.4	PSG*25...

(1) Can be used with both wide grooving and profile grooving inserts

SPARE PARTS



Designation	Lever	Clamping screw	Spring	Wrench
FPGR****-10T..., 15T...	FCL4	FCS3	BP-5	P-2.5
FPGR****-20T..., 25T...	FCL8	FCS6	BP-9	P-5

Reference pages

Inserts → C126 - C127, Standard cutting conditions → C127