




# Zamus Copper-Mate Series



ENDMILL SERIES

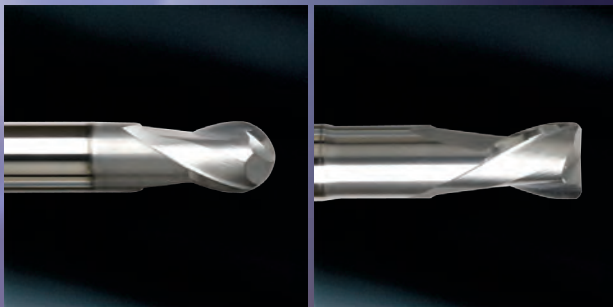




Zamus Copper-Mate Series



EDP. No.	APPEARANCE	FEATURE	STOCK	PAGE
BC502 .....series		2 FLUTE, STUB CUT LENGTH, BALL NOSE with EXTENDED NECK	•	214
RC502.....series		2 FLUTE, STUB CUT LENGTH, CORNER RADIUS with EXTENDED NECK	•	215

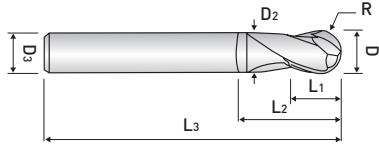

**2 FLUTE, STUB CUT LENGTH,  
BALL NOSE with EXTENDED NECK**

- Suitable for copper & non-ferrous material.

**BC502 ...series**




EDP. No.	D	R	L <sub>1</sub>	L <sub>2</sub>	L <sub>3</sub>	D <sub>2</sub>	D <sub>3</sub>	STOCK
BC502010	1	0.5	1.5	3	50	0.95	6	•
BC502015	1.5	0.75	2	4	50	1.45	6	•
BC502020	2	1	2.5	5	50	1.95	6	•
BC502025	2.5	1.25	3	7	50	2.45	6	•
BC502030	3	1.5	4	10	60	2.9	6	•
BC502040	4	2	5	10	60	3.9	6	•
BC502050	5	2.5	6	12	60	4.9	6	•
BC502060	6	3	7	12	60	5.9	6	•
BC502061					90			
BC502080	8	4	9	15	70	7.9	8	•
BC502081				16	100			
BC502100	10	5	11	25	75	9.9	10	•
BC502101					100			
BC502120	12	6	12	25	80	11.9	12	•
BC502121					110			

■ Tolerance

Radius (mm)	Shank Dia.
±0,01	h6


※Items can be changed for quality improvement without notice.

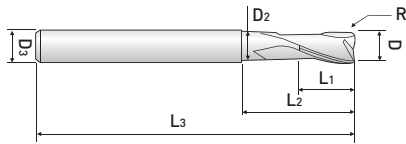

**2 FLUTE, STUB CUT LENGTH,  
CORNER RADIUS with EXTENDED NECK**

- Suitable for copper & non-ferrous material.

**RC502 .....series**



EDP. No.	D	R	L <sub>1</sub>	L <sub>2</sub>	L <sub>3</sub>	D <sub>2</sub>	D <sub>3</sub>	STOCK
RC5020200509	2	0.5	3	9	55	1.8	6	•
RC5020300509	3	0.5	4	9	55	2.8	6	•
RC5020300516				16				
RC5020300520				20				
RC5020400512	4	0.5	5	12	55	3.7	6	•
RC5020400516				16				
RC5020400520				20				
RC5020600520	6	0.5	7	20	60	5.5	6	•
RC5020601020		1						
RC5020800525	8	0.5	9	25	60	7.4	8	•
RC5020801025		1						
RC5021000532	10	0.5	11	32	70	9.2	10	•
RC5021001032		1						
RC5021200538	12	0.5	12	38	80	11	12	•
RC5021201038		1						

■ Tolerance

Mill Dia. (mm)		Shank Dia.
Diameter	Tolerance	
up to 6	0 ~ -0,012	h6
over 6	0 ~ -0,015	

※Items can be changed for quality improvement without notice.